


European Catalogue

Optyma™ Bare condensing units

R290, R452A, R134a/R513A, R448A, R449A, R407A, R407C, R407F, R404A/R507

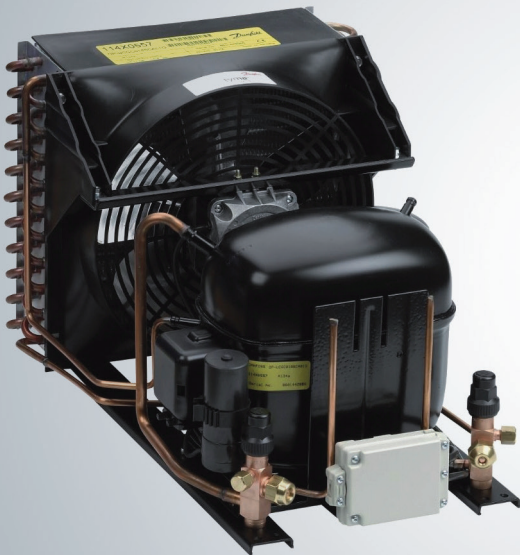

Model	Code	Version	Compressor	Electrical code (1)	Tamb [°C]	Cooling capacity Q [kW] (2)						EcoDesign (3)			
						Te [°C]						Q [kW]	P [kW]	COP	SEPR
						-20°C	-15°C	-10°C	-5°C	0°C	5°C				
OP-MCHC004	114X0301 114X0302 114X0303	A00 A01 A04	TL4DL	G	27	0.262	0.294	0.348	0.422	0.515	0.622	0.330	0.206	1.60	
					32	0.230	0.262	0.315	0.386	0.474	0.574				
					38	0.195	0.226	0.276	0.342	0.422	0.513				
					43	0.167	0.196	0.243	0.303	0.376	0.458				
OP-MCHC006	114X2316 114X2317 114X2319	A00 A01 A04	FR6DL	G	27	0.376	0.455	0.552	0.666	0.796	0.941	0.524	0.372	1.41	
					32	0.337	0.409	0.499	0.603	0.723	0.856				
					38	0.293	0.357	0.435	0.528	0.633	0.751				
					43	0.259	0.314	0.383	0.464	0.557					
OP-MCHC007	114X2424 114X2425 114X2427	A00 A01 A04	NF7MLX	G	27		0.588	0.720	0.869	1.037	1.223	0.690	0.444	1.55	
					32		0.535	0.657	0.796	0.952	1.127				
					38		0.470	0.581	0.708	0.850	1.010				
					43		0.417	0.518	0.634	0.764	0.911				
OP-MCHC010	114X0403 114X0404 114X0405	A00 A01 A04	SC10MLX	G	27	0.620	0.767	0.938	1.132	1.348	1.583	0.898	0.515	1.74	
					32	0.560	0.696	0.853	1.031	1.229	1.445				
					38	0.487	0.609	0.749	0.908	1.085	1.279				
					43	0.426	0.535	0.661	0.804	0.963	1.138				
OP-MCHC013	114X0406 114X0407 114X0408	A00 A01 A04	SC12MLX	G	27	0.737	0.905	1.098	1.316	1.555	1.813	1.053	0.620	1.70	
					32	0.666	0.820	0.997	1.196	1.416	1.653				
					38	0.579	0.717	0.875	1.052	1.247	1.458				
					43	0.506	0.630	0.771	0.930	1.104	1.294				
OP-MCHC015	114X2649 114X2651	A01 A04	SC15MLX	G	27	0.934	1.148	1.396	1.677	1.991	2.337	1.341	0.836	1.60	
					32	0.844	1.043	1.273	1.534	1.826	2.150				
					38	0.738	0.916	1.124	1.360	1.625	1.919				
					43	0.651	0.811	0.998	1.212	1.453	1.722				
OP-MCHC018	114X0702 114X0703	A01 A04	SC18MLX	G	27	1.073	1.315	1.594	1.909	2.259	2.642	1.533	0.873	1.76	
					32	0.970	1.195	1.453	1.745	2.070	2.428				
					38	0.848	1.050	1.282	1.545	1.840	2.164				
					43	0.748	0.929	1.139	1.377	1.644	1.939				
OP-MCHC021	114X2765 114X2767	A01 A04	GS21MLX	G	27	1.259	1.557	1.898	2.278	2.694	3.141	1.810	1.039	1.74	
					32	1.128	1.402	1.715	2.064	2.446	2.859				
					38	0.978	1.222	1.500	1.811	2.152	2.523				
					43	0.858	1.076	1.325	1.603	1.910	2.244				

MBP

(1) **E** - 400V-3ph-50Hz Compressor & 230V-1ph-50Hz Fan
G - 230V-1ph-50Hz Compressor & 230V-1ph-50Hz Fan

(2) Nominal conditions (EN13215), Evaporating temperatures at dew point, Superheat 10K, Subcooling 0K

(3) Rated conditions (EN13215), Evaporating temperature (dew point) -10°C, Ambient air temperature +32°C, Return Gas Temperature 20°C, Subcooling 0K

COP: Coefficient Of Performance link to EN13215 and ErP (Energy related Products) 2009/125/CE

SEPR: Seasonal Energy Performance Ratio link to EN13215 and ErP (Energy Related Products) 2009/125/CE

Tamb [°C]: Ambient Temperature

Te [°C]: Evaporating Temperature

Q [kW]: Cooling Capacity in Kilo Watt

P [kW]: Power Input in Kilo Watt

Version

A00: Without valves and receiver for capillary tubes

A01: With receiver, 2stop valves, brackets and copper pipes for KP

A04: A01 + KP17 WB + FSA-kit + power cord



For regular updates and detailed capacities, please refer to **Coolselector®2** software



Application	Code number			Model number	Compressor Model	Electrical Code (1)	Refrigerant (2)	Condenser Coil			Fan		Receiver	Dimensions				Suction line	Liquid line	Weight	
								Type	Airflow	Internal Volume	Number	Blade ø	Volume	Chassis	Height	Width	Depth	inch	inch	Gross	Net
		(m³/h)	(dm³)						(mm)	(L)	mm	mm	mm	inch	inch	Kg	Kg				
LBP	114X1208	114X1209	114X1211	OP-LCHC004TL	TL4CL	G	H	BG2	231	0.25	1	200	0.8	2	226	312	446	1/4"	1/4"	19	17
LBP	114X1216	114X1217	114X1219	OP-LCHC006FR	FR6CL	G	H	BG2	231	0.25	1	200	0.8	2	226	312	446	3/8"	1/4"	19	17
LBP	114X1328	114X1329	114X1331	OP-LCHC007NL	NL7CLX	G	H	BG3	518	0.31	1	230	1.1	9	256	321	471	3/8"	1/4"	20	18
LBP	114X1324	114X1325	114X1327	OP-LCHC008FR	FR8.5CL	G	H	BG3	518	0.31	1	230	1.1	9	256	321	471	3/8"	1/4"	20	18
LBP	114X1304	114X1301	114X1302	OP-LCHC008NL	NL8.4CLX	G	H	BG3	518	0.31	1	230	1.1	7	256	318	513	3/8"	1/4"	22	20
LBP	114X1440	114X1441	114X1443	OP-LCHC012SC	SC12CL	G	H	BG4/5	631	0.4	1	254	1.1	10	296	331	487	3/8"	1/4"	25	22
LBP	114X1444			OP-LCHC012SC	SC12CLX.2	G	H	BG4/5	631	0.4	1	254	1.1	10	296	331	487	3/8"	1/4"	23	20
LBP	114X1548	114X1549	114X1551	OP-LCHC015SC	SC15CLX	G	H	BG4/5	631	0.4	1	254	1.1	10	296	331	487	3/8"	1/4"	26	23
LBP	114X1556	114X1557	114X1559	OP-LCHC018SC	SC18CL	G	H	BG4/5	631	0.4	1	254	1.1	11	296	331	513	1/2"	1/4"	26	23
LBP	114X1600	114X1601	114X1602	OP-LCHC021SC	SC21CL	G	H	BG6	1150	0.63	1	300	1.1	12	350	445	613	1/2"	1/4"	47	41
LBP		114X1673		OP-LCHC026GS	GS26CLX	G	H	BG6	1150	0.63	1	300	2.4	13	340	430	480	1/2"	3/8"	45	39
LBP		114X1781	114X1783	OP-LCHC034GS	GS34CLX	G	H	BG7	990	0.84	1	300	2.4	13	340	430	480	1/2"	3/8"	48	42
LBP		114X1221		OP-LCQC004ML	MLY45Lab	G	Q	BG2	231	0.25	1	200	0.8	5	226	302	513	3/8"	1/4"	19	17
LBP		114X1337		OP-LCQC006ML	MLY60Lab	G	Q	BG3	518	0.31	1	230	1.1	7	256	318	513	3/8"	1/4"	20	18
LBP		114X1341		OP-LCQC008ML	MLY80Lab	G	Q	BG3	518	0.31	1	230	1.1	7	256	318	513	3/8"	1/4"	20	18
LBP		114X1449		OP-LCQC012ML	MLY12Lab	G	Q	BG4/5	631	0.4	1	254	1.1	11	296	331	513	3/8"	1/4"	25	22
LBP		114X1569		OP-LCQC012MP	MPT12LA	G	Q	BG4/5	631	0.4	1	254	1.1	11	296	331	513	3/8"	1/4"	26	23
LBP		114X1573		OP-LCQC014MP	MPT14LA	G	Q	BG4/5	631	0.4	1	254	1.1	11	296	331	513	1/2"	1/4"	26	23
MBP	114X0104	114X0105	114X0107	OP-MCGC003TL	TL3GX	G	G	BG1	243	0.13	1	172	0.8	1	205	289	424	1/4"	1/4"	16	14
MBP	114X0108	114X0109	114X0111	OP-MCGC004TL	TL4GX	G	G	BG1	243	0.13	1	172	0.8	1	205	289	424	1/4"	1/4"	16	14
MBP	114X0112	114X0113	114X0115	OP-MCGC005TL	TL5GX	G	G	BG1	243	0.13	1	172	0.8	1	205	289	424	1/4"	1/4"	16	14
MBP	114X0200	114X0201	114X0203	OP-MCGC006FR	FR6GX	G	G	BG2	231	0.25	1	200	0.8	2	226	312	446	3/8"	1/4"	19	17
MBP	114X0228			OP-MCGC006NL	NL6.1MF	G	G	BG2	231	0.25	1	200	0.8	3	226	304	432	3/8"	1/4"	19	17
MBP	114X0216	114X0217	114X0219	OP-MCGC007FR	FR7.5GX	G	G	BG2	231	0.25	1	200	0.8	2	226	312	446	3/8"	1/4"	19	17
MBP	114X0244			OP-MCGC007NL	NL7.3MF	G	G	BG2	231	0.25	1	200	0.8	3	226	304	432	3/8"	1/4"	19	17
MBP	114X0224	114X0225	114X0227	OP-MCGC008FR	FR8.5GX	G	G	BG2	231	0.25	1	200	0.8	2	226	312	446	3/8"	1/4"	19	17
MBP	114X0204	114X0205		OP-MCGC008NL	NL8.4MF	G	G	BG2	231	0.25	1	200	0.8	4	225	313	470	3/8"	1/4"	25	22
MBP	114X0352			OP-MCGC008NL	NL8.4MF	G	G	BG3	518	0.31	1	230	-	6	256	310	444	3/8"	1/4"	20	18
MBP			114X0223	OP-MCGC010SC	SC10GX	G	G	BG2	231	0.25	1	200	0.8	2	226	312	446	3/8"	1/4"	21	19
MBP	114X0336	114X0337	114X0339	OP-MCGC011FR	FR11GX	G	G	BG3	518	0.31	1	230	1.1	8	256	321	458	3/8"	1/4"	20	18
MBP	114X0340	114X0341	114X0343	OP-MCGC012SC	SC12GX	G	G	BG3	518	0.31	1	230	1.1	8	256	321	458	3/8"	1/4"	22	20
MBP	114X0448	114X0449	114X0451	OP-MCGC015SC	SC15GX	G	G	BG4/5	631	0.4	1	254	1.1	10	296	331	478	3/8"	1/4"	25	22
MBP	114X0556	114X0557	114X0559	OP-MCGC018SC	SC18G	G	G	BG4/5	631	0.4	1	254	1.1	10	296	331	478	3/8"	1/4"	27	24
MBP	114X0568			OP-MCGC021SC	SC21MF	G	G	BG4/5	631	0.4	1	254	1.1	10	296	331	478	3/8"	1/4"	26	23
MBP	114X0564	114X0565	114X0567	OP-MCGC021SC	SC21GX	G	G	BG4/5	631	0.4	1	254	1.1	11	296	331	513	3/8"	1/4"	26	23
MBP		114X0773		OP-MCGC026GS	GS26MFX	G	G	BG7	990	0.84	1	300	2.4	13	340	430	480	3/8"	1/4"	39	33
MBP		114X0781		OP-MCGC034GS	GS34MFX	G	G	BG7	990	0.84	1	300	2.4	13	340	430	480	1/2"	3/8"	40	34
MBP	114X2424	114X2425	114X2427	OP-MCHB007NF	NF7MLX	G	H	BG4/5	631	0.4	1	254	1.1	10	296	331	478	3/8"	1/4"	25	22
MBP	114X0301	114X0302	114X0303	OP-MCHC004TL	TL4DL	G	H	BG3	518	0.31	1	230	1.1	6	256	310	444	3/8"	1/4"	18	16
MBP	114X2316	114X2317	114X2319	OP-MCHC006FR	FR6DLX	G	H	BG3	518	0.31	1	230	1.1	8	256	321	458	3/8"	1/4"	20	18
MBP	114X0403	114X0404	114X0405	OP-MCHC010SC	SC10MLX	G	H	BG4/5	631	0.4	1	254	1.1	10	296	331	478	3/8"	1/4"	26	23
MBP	114X0406	114X0407	114X0408	OP-MCHC013SC	SC12MLX	G	H	BG4/5	631	0.4	1	254	1.1	10	296	331	478	3/8"	1/4"	27	24
MBP		114X2649	114X2651	OP-MCHC015SC	SC15MLX	G	H	BG6	1132	1.1	1	300	1.1	14	350	445	613	1/2"	1/4"	48	42
MBP	114X0702	114X0703		OP-MCHC018SC	SC18MLX	G	H	BG7	990	0.84	1	300	1.1	14	350	445	613	1/2"	1/4"	39	33
MBP	114X2765		114X2767	OP-MCHC021GS	GS21MLX	G	H	BG7	990	0.84	1	300	1.6	13	340	430	480	5/8"	3/8"	48	42

- (1) E - 400V-3ph-50Hz Compressor & 230V-1ph-50Hz Fan
- G - 230V-1ph-50Hz Compressor & 230V-1ph-50Hz Fan
- (2) G - R134a
- H - R404A/R507
- Q - R452A/R404A/R507

Danfoss Cooling

is a worldwide manufacturer of compressors and condensing units for refrigeration and HVAC applications. With a wide range of high quality and innovative products we help your company to find the best possible energy efficient solution that respects the environment and reduces total life cycle costs.

We have 40 years of experience within the development of hermetic compressors which has brought us amongst the global leaders in our business, and positioned us as distinct variable speed technology specialists. Today we operate from engineering and manufacturing facilities spanning across three continents.



Danfoss Scrolls

Danfoss Inverter Scrolls

Danfoss Maneurop Reciprocating Compressors

Danfoss Light Commercial Refrigeration Compressors

Danfoss Turbocor Compressors

Danfoss Optyma™ Condensing Units

Our products can be found in a variety of applications such as rooftops, chillers, residential air conditioners, heatpumps, coldrooms, supermarkets, milk tank cooling and industrial cooling processes.

www.danfoss.com

Danfoss, BP 331, 01603 Trévoux Cedex, France | +334 74 00 28 29

member of:



Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.